


FROST
DENMARK

MIRROR 4139

DESIGNED BY BØNNELYCKE MDD

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

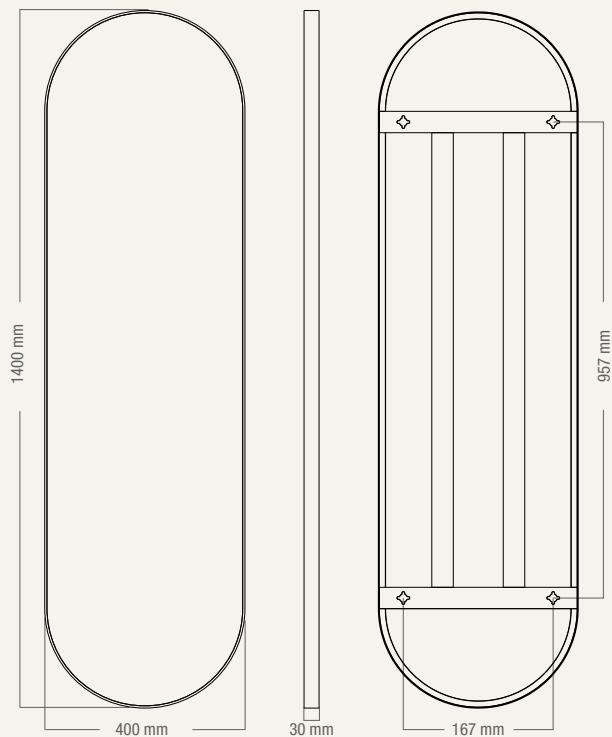

MATERIAL: ALUMINIUM
AVAILABLE IN THE FROST FINISHES:



U4139-B
MATT
BLACK




U4139-W
MATT
WHITE



MOUNTING

! Mirror 4139 can be mounted in either a horizontal or vertical orientation. It is compatible with the Backlight Plate U4139-BACK (sold separately).


For installation with the backlight plate, please refer to the dedicated mounting instructions.

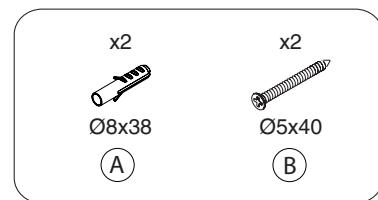


1 Mark the placement of the screw holes for mounting the mirror on the wall.

Drill out the marked holes with a 8 mm drill bit and insert the enclosed Ø8x38 mm wall plugs (A). With a PH2 bit tighten the enclosed 5x40 mm screws (B), but leave a small gap between the screw head and the wall.

*NOTE: some older models have different cc measure of 300 mm when mounted vertically.

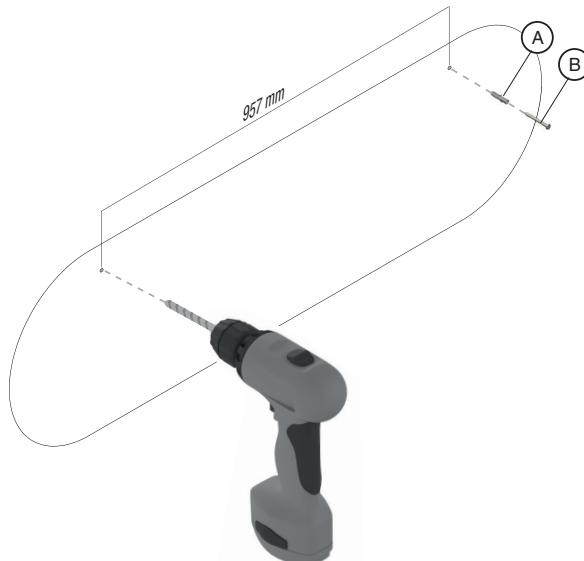

2 Lift the Mirror onto the screws and slide it down until it locks securely into place.

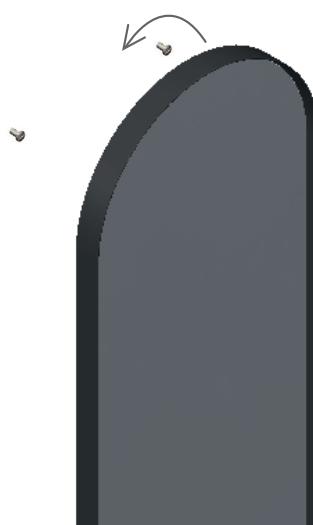

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

