
FROST
DENMARK

BASIN MIXER TAP 1987

DESIGNED BY BØNNELYCKE MDD

PRODUCT DETAILS, TECHNICAL DETAILS AND FITTING INSTRUCTIONS

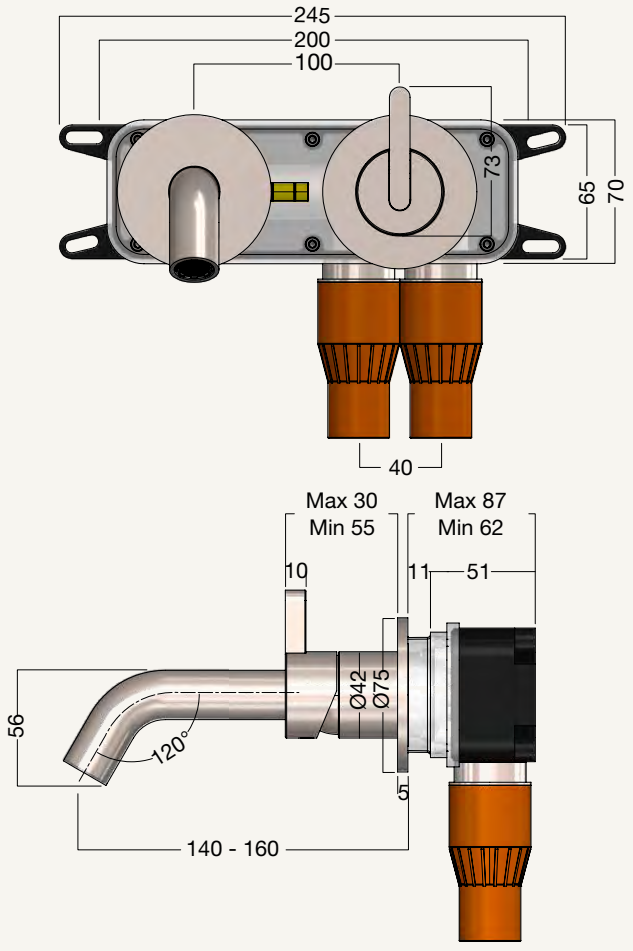

MATERIAL: STAINLESS STEEL


AVAILABLE IN THE NINE FROST FINISHES:


F1987	F1987-P	F1987-BOC	F1987-C	F1987-BMG	F1987-GO	F1987-BCB	F1987-B	F1987-W
BRUSHED STAINLESS	POLISHED STAINLESS	BRUSHED COPPER	POLISHED COPPER	BRUSHED GOLD	POLISHED GOLD	BRUSHED BLACK	MATT BLACK	MATT WHITE




BEFORE MOUNTING

1 Before mounting please ensure the wall cavity can accommodate the concealed mixer body. Verify that the finished wall surface will fall within the MIN /MAX installation range shown on the drawings below.






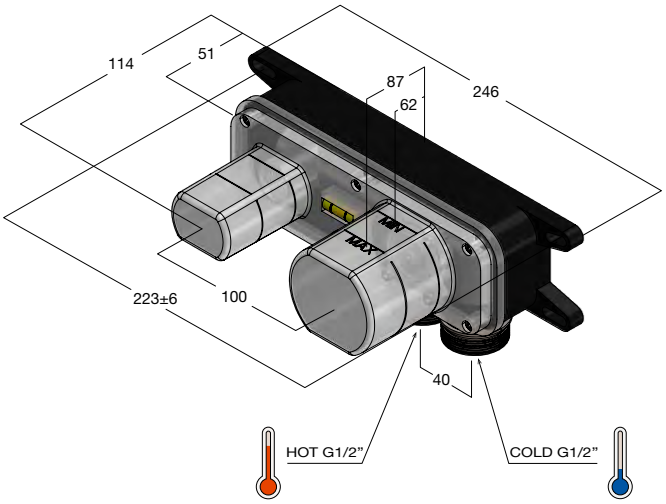

MOUNTING


2 Position the mixer body in the wall cavity and secure it using the four enclosed Ø4x42 screws and Ø5x30 wall plugs. The mixer body features an integrated spirit level, allowing the installation to be aligned accurately before the screws are fully tightened.

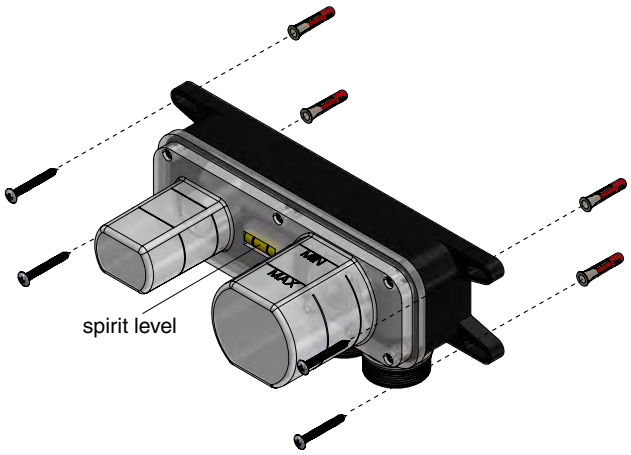

3 Connect the hot and cold water supplies to the mixer body and ensure that all connections are tightened securely.

Remember to fit the enclosed protective sleeves and O-rings to the outlet connections before testing the installation.


Before putting the system into use, flush the pipework thoroughly to remove any debris that could damage the cartridge or affect performance.

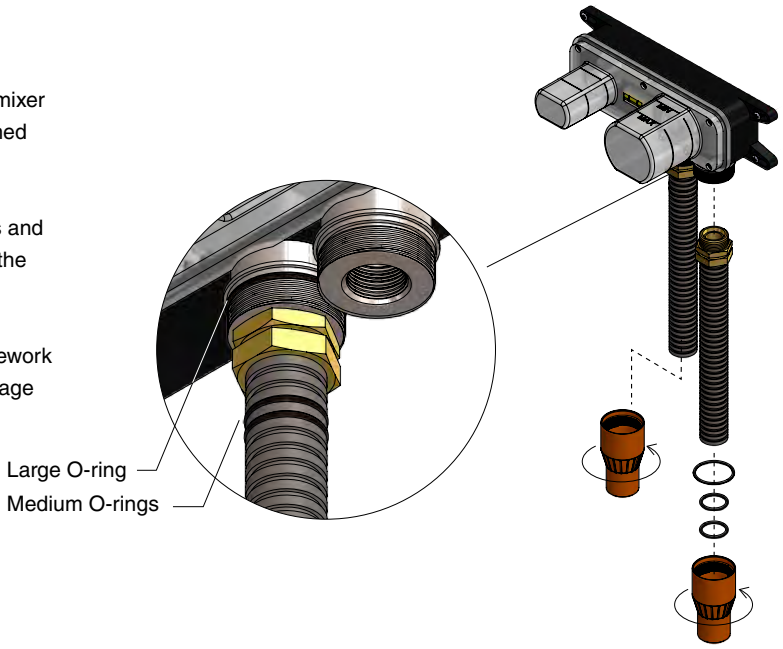

4

Turn on the water supply and carry out a pressure test of the installation. Carefully inspect all connections and joints for leaks.


Make sure there are no leaks before closing and finishing the wall.

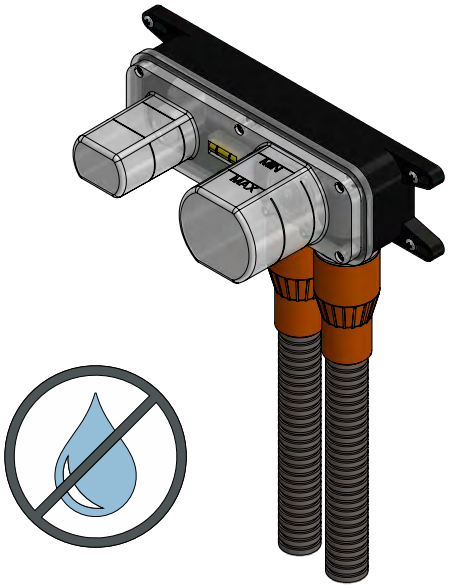

5


Once the installation has been tested and approved, fill the cavity and apply the waterproofing membrane.

Ensure that the spout connection, cartridge spindle, and mounting threads remain accessible and protected from debris during this stage.

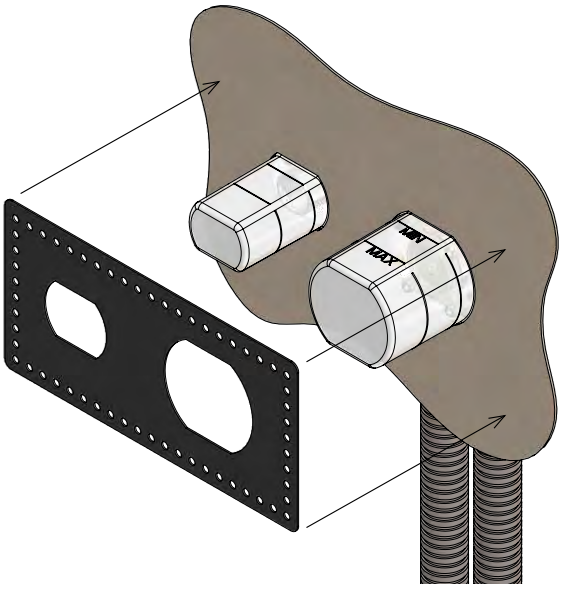

6


Apply silicone sealant around the edge where the water-proofing membrane meets the protective cover to create a watertight seal.

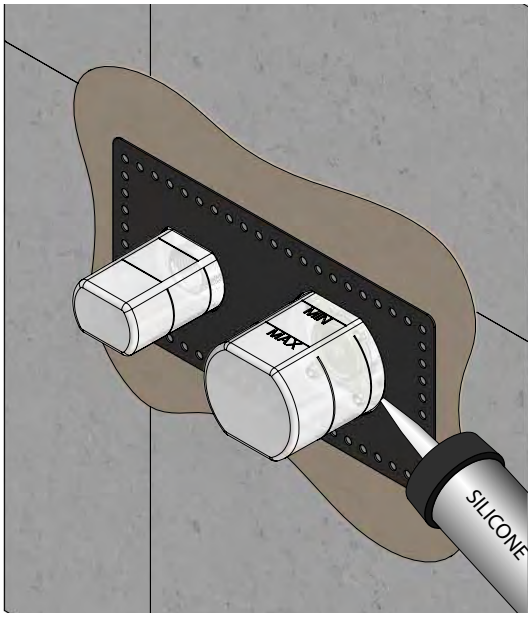

Apply the final wall finish, such as tiles or other wall coverings.

7


For installations with tiles or similar wall coverings, cut holes for the protective covers according to the diameters shown in the illustration.

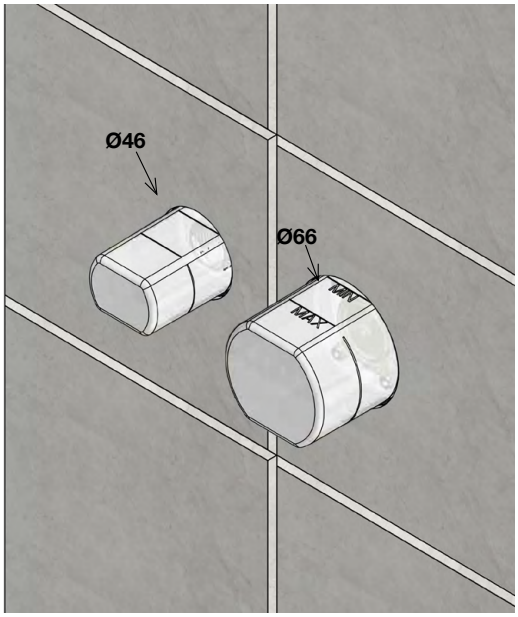


8

Trim the protective cover so that it aligns with the surface of the finished wall. The final cut must be made between the MAX and MIN cut lines.

Ensure a clean cut and remove any loose material before proceting to the next step.

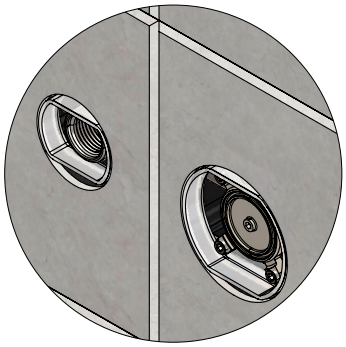


Cut bewteen MIN /MAX

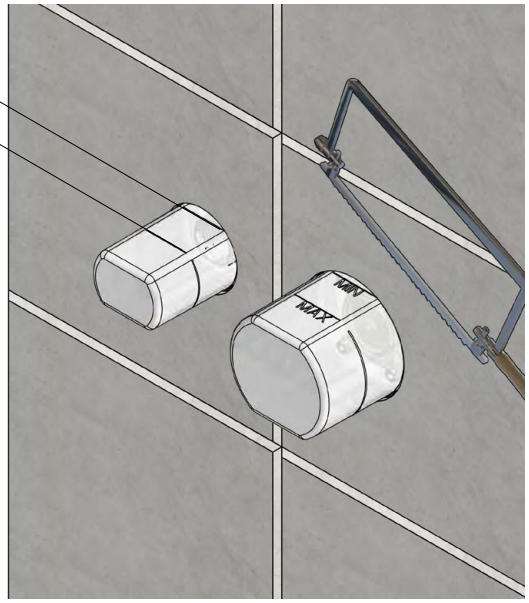


9


Remove the temporary protective cover from the mixer body. Save the four screws for later use.

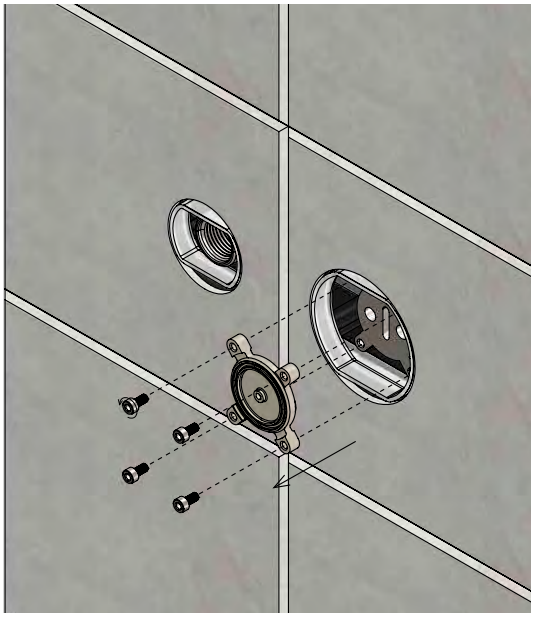

10 Install the mounting bracket for the cartridge and the handle using the four enclosed screws, as illustrated.

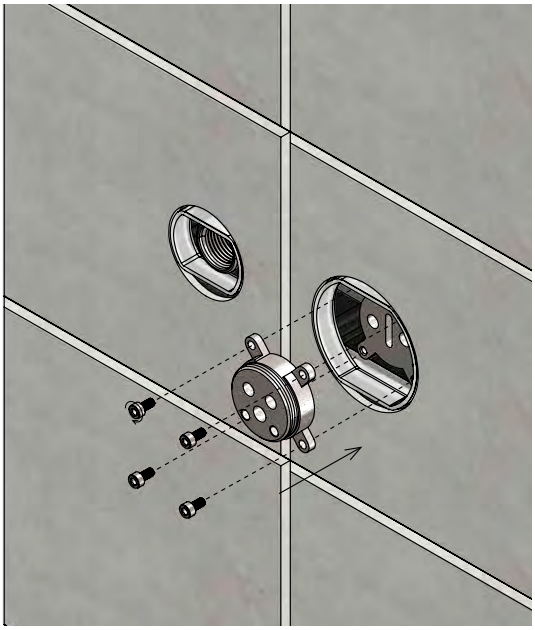


11 Fit the cartridge into the mounting bracket and screw on the handle sleeve as illustrated. Secure the cartridge with the fixing nut, then fit the escutcheon as shown.

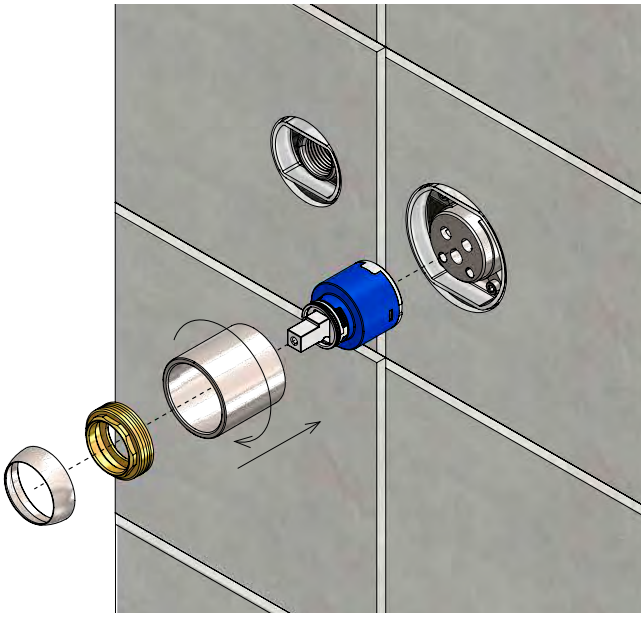

12 Push the cover rose with the large cut-out onto the handle sleeve until it sits against the wall.

Mount the handle and secure it using the enclosed set screw underneath. Then, press the cover cap into place to conceal the screw hole in the handle.

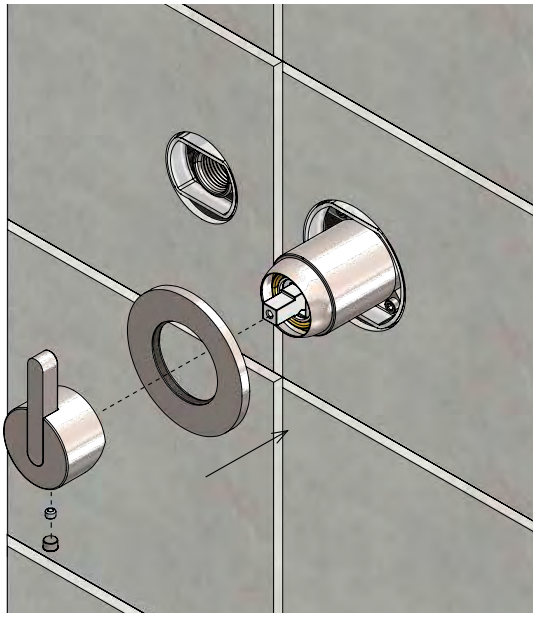


13

Cover the spout threads with plumbing hemp and sealing compound.

Push the cover rose with the small cut-out against the wall, then screw the spout into the mixer body.

Ensure that the spout is correctly aligned, with the outlet facing down towards the basin.

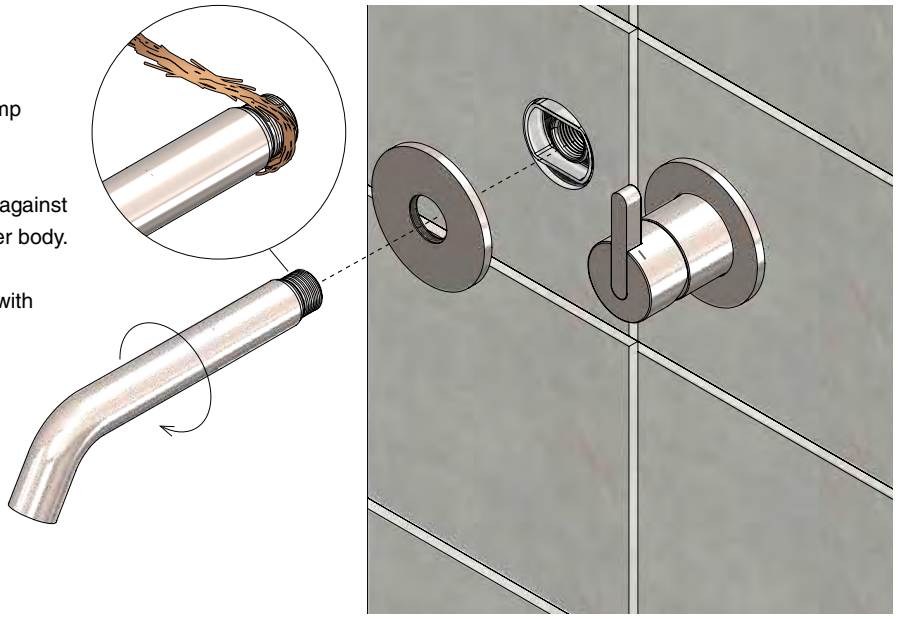


14

The Basin Mixer 1988 is now ready for use.


Proper care and regular cleaning will help extend the lifespan of your Mixer.

FROST also provides different spare parts for purchase to ensure long-term functionality.

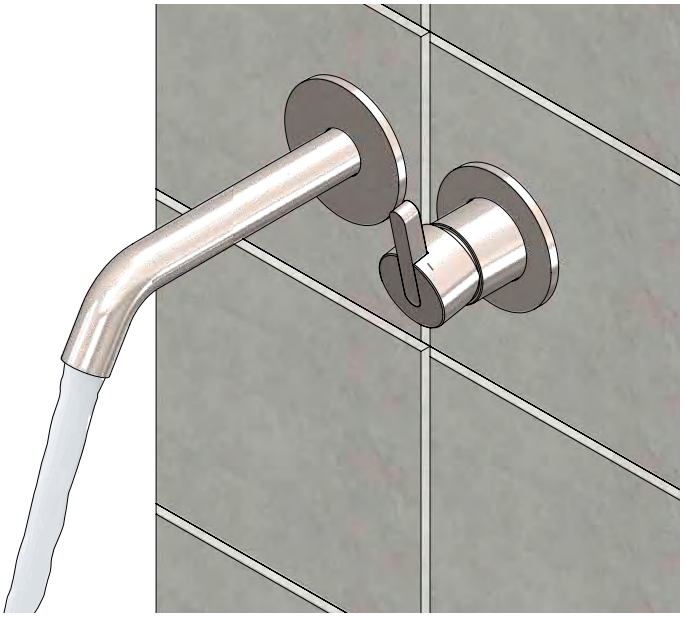

15

For cold water, turn the handle to the right.
For warm water, turn the handle to the left.

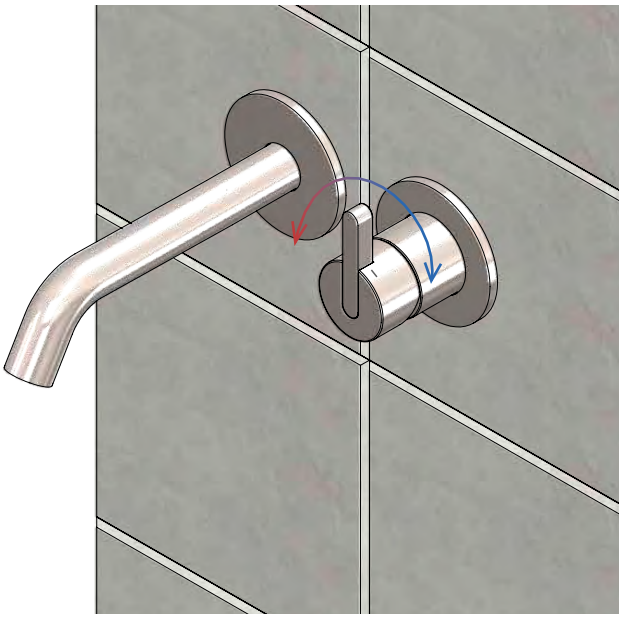

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

Be sure to follow local building and plumbing regulations when installing the mixer tap.
Consult a professional if you are unsure.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn