


FROST

DENMARK

WASH BASIN 1942

DESIGNED BY BØNNELYCKE MDD

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

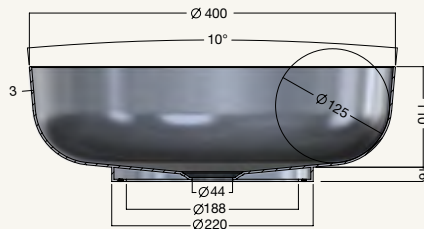

MATERIAL: STAINLESS STEEL

AVAILABLE IN THE FROST FINISHES:



F1942
BRUSHED
STAINLESS



F1942-BOC
BRUSHED
COPPER



F1942-BMG
BRUSHED
GOLD



F1942-BCB
BRUSHED
BLACK


PREPARE THE COUNTERTOP

- 1 Plan the installation of the mixer tap and waste trap before preparing the countertop.

Prepare the mixer tap hole according to the selected mixer. A 250 mm centre-to-centre distance between the mixer and basin is recommended when using a FROST mixer.

Mark and cut one Ø100 mm hole for the waste outlet and four Ø6 mm holes for the mounting screws, as illustrated.

Clean the countertop thoroughly before further installation.

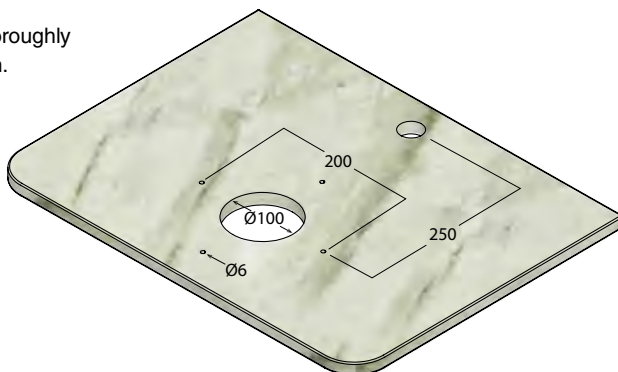

MOUNTING THE BASIN

- 2 Turn the basin upside down and apply sanitary-graded silicone around the underside mounting surface. Do not apply an excessive amount of silicone.


When installing, please avoid silicone residue on the basin. If this should occur, please remove it as quickly as possible by gently using mild soapy water and a soft cloth while the silicone is still wet.



-
- ③ Carefully position the basin over the cut-out and align it correctly. Secure the basin to the countertop using the four enclosed M5 screws.

Remove any excess silicone immediately using a soft cloth.

The basin is supplied with the FROST Pop-Up Waste 1990. Please refer to the installation guide below for installation instructions.

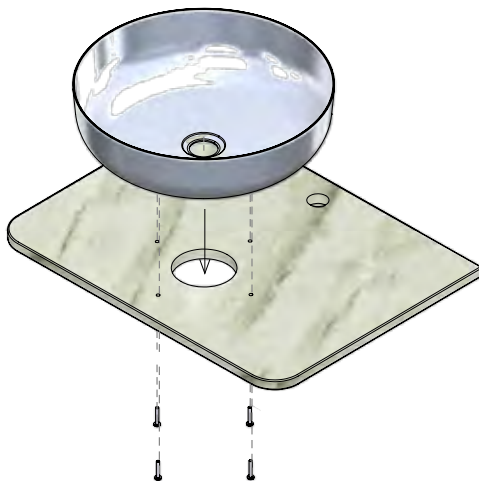

CLEANING AND MAINTENANCE

- ④ FROST Wash Basins 1942 are made from stainless steel and finished with a PVD (Physical Vapor Deposition) coating. The PVD process creates an extremely hard, durable surface with a rich and elegant finish.

To maintain the surface, clean it regularly and avoid allowing liquids to dry on the basin, as this may cause limescale deposits or staining. Use mild, non-abrasive cleaning agents and wipe the basin dry with a soft cloth after use. Do not place damp cloths or textiles on the product.

Only neutral cleaning agents free from acids, chlorine, phosphorus, or limescale-removing ingredients should be used. Never use abrasive pads, scouring sponges, or steel wool.

Limescale can be removed using a mild vinegar solution (1 part white vinegar to 5 parts water). Apply the solution briefly (2-5 minutes), then rinse thoroughly with clean water and wipe dry with a soft cloth. Do not allow the solution to dry on the surface.

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

