


FROST

DENMARK

UNU SHELVES H150-SERIES

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

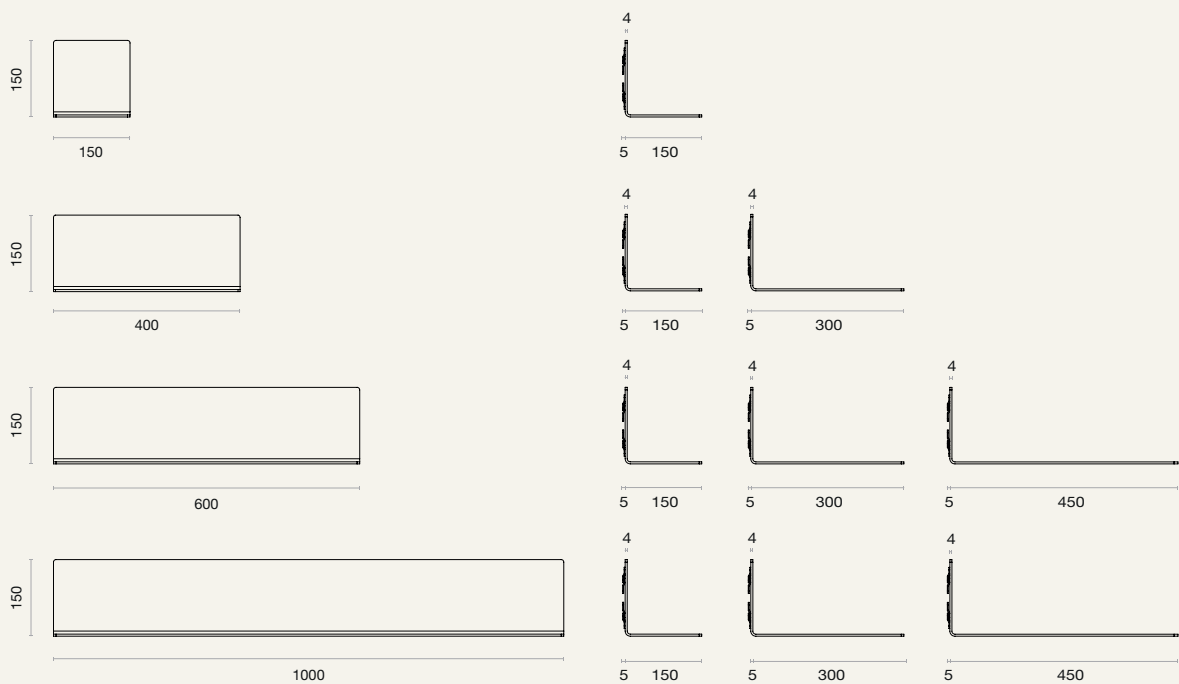

ITEM NUMBERS:


U4020, U4046, U4047, U4021, U4022,
U4023, U4024, U4036 & U4037

MATERIAL: ALUMINIUM

DESIGNED BY BØNNELYCKE MDD

MOUNTING OF U4020

Secure the mounting bars (A) and (B) on the wall as illustrated. Use ten (D) wall plugs and (E) screws.

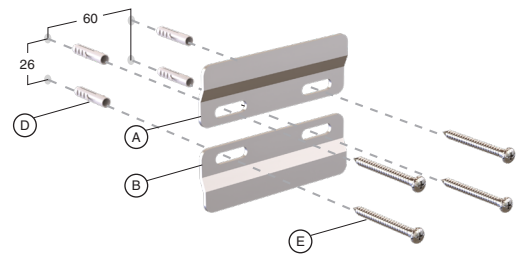

1


NOTE: The lower mounting bar (B) should only be mounted if the shelf is installed in public or any area with the risk of people removing the shelf.

Please use the amount of screws and plugs suitable for your walls and the intended load.

Slide the shelf (C) onto the mounting bracket (A) and (B).


2

NOTE: Due to the mounting adaptability shelves can also be mounted upside down. Maximum shelf load is 40 kg.

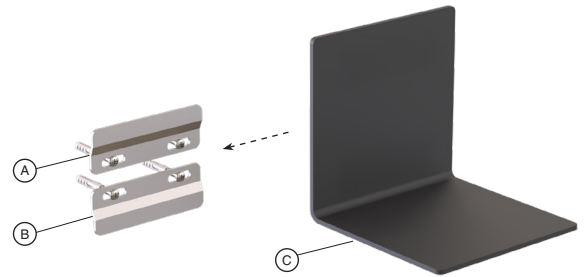

MOUNTING OF U4046 & U4047

Secure the mounting bars (A) and (B) on the wall as illustrated. Use ten (D) wall plugs and (E) screws.

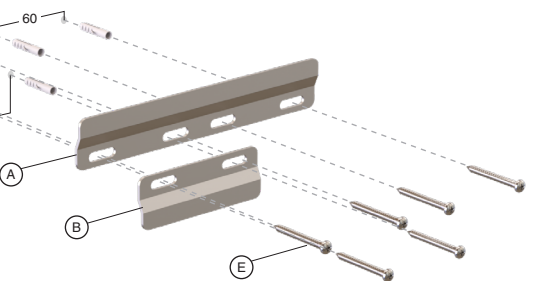

1


NOTE: The lower mounting bar (B) should only be mounted if the shelf is installed in public or any area with the risk of people removing the shelf.

Please use the amount of screws and plugs suitable for your walls and the intended load.

Slide the shelf (C) onto the mounting bracket (A) and (B).

2

NOTE: Due to the mounting adaptability shelves can also be mounted upside down. Maximum shelf load is 40 kg.

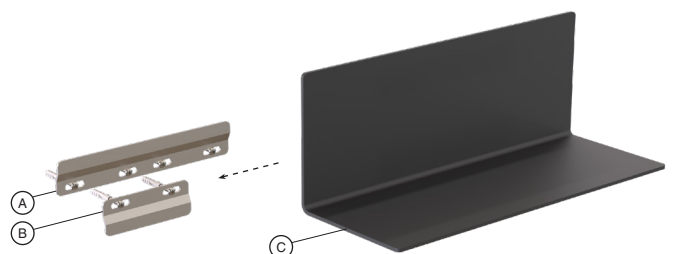


MOUNTING OF U4021, U4023 & U4036

Secure the mounting bars (A) and (B) on the wall as illustrated. Use ten (D) wall plugs and (E) screws.

1

NOTE: The lower mounting bar (B) should only be mounted if the shelf is installed in public or any area with the risk of people removing the shelf.


Please use the amount of screws and plugs suitable for your walls and the intended load.

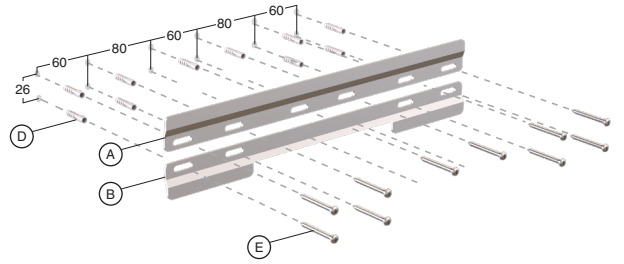

Slide the shelf (C) onto the mounting bracket (A) and (B).

2

NOTE: Due to the mounting adaptability shelves can also be mounted upside down. Maximum shelf load is 40 kg.

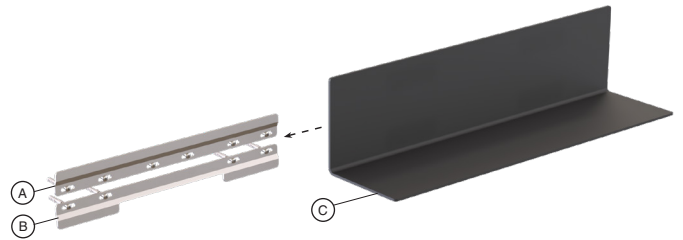


MOUNTING OF U4022, U4024 & U4037

Secure the mounting bars (A) and (B) on the wall as illustrated. Use ten (D) wall plugs and (E) screws.

1

NOTE: The lower mounting bar (B) should only be mounted if the shelf is installed in public or any area with the risk of people removing the shelf.


Please use the amount of screws and plugs suitable for your walls and the intended load.

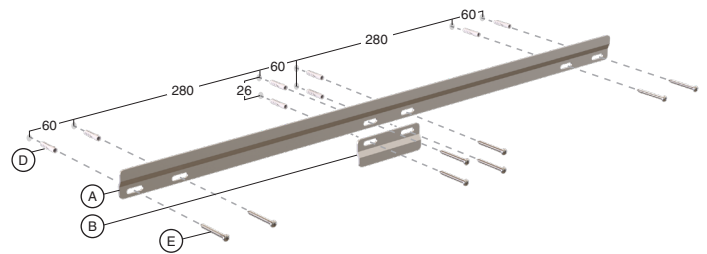

Slide the shelf (C) onto the mounting bracket (A) and (B).

2

NOTE: Due to the mounting adaptability shelves can also be mounted upside down. Maximum shelf load is 40 kg.

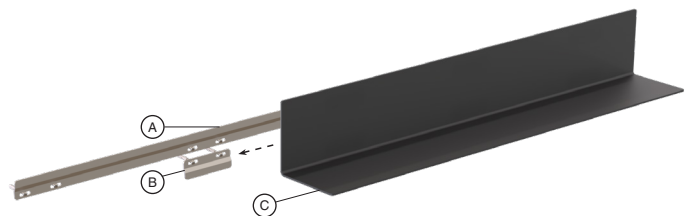

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

