


LOTUS KNOB 4026

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

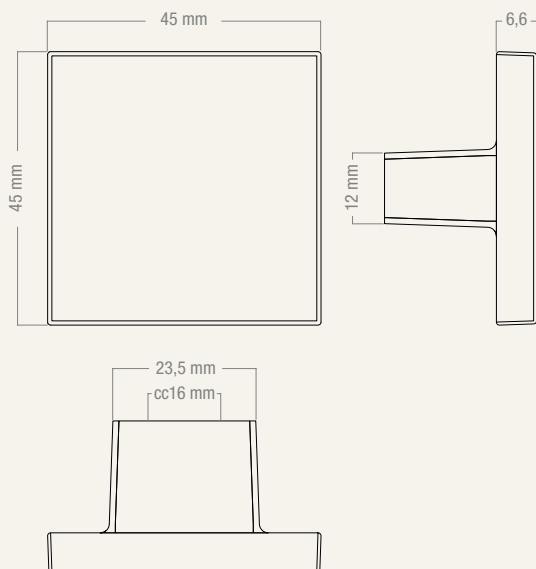

MATERIAL: STAINLESS STEEL

AVAILABLE IN THE NINE FROST FINISHES:



H402601601
BRUSHED
STAINLESS



H402601655
BRUSHED
COPPER



H402601665
BRUSHED
GOLD



H402601674
BRUSHED
BLACK



H402601675
MATT
BLACK




H402601676
MATT
WHITE



MOUNTING


- 1 If there is no pre-drilled hole, drill two holes with a 16 mm cc through the cabinet door or drawer front using a Ø4 mm drill bit.

Depending on the thickness, use either the Ø4×22 mm or Ø4×28 mm panhead screws and insert it from the inside of the door or drawer.




- 2 Attach the Knob from the front and tighten it securely. For easier tightening, use a screwdriver from the back.

Ensure the Knob is properly aligned before fully tightening the screws.

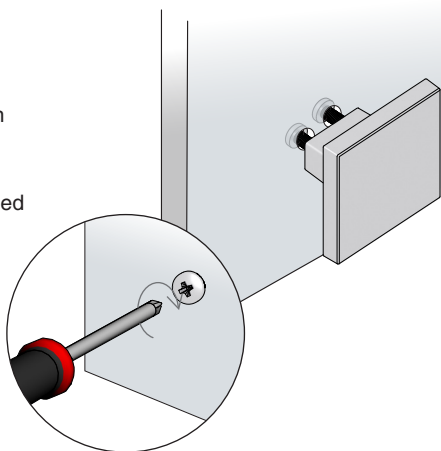

- 3 The Lotus Knob is now ready for use.

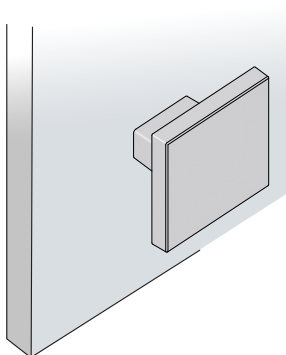

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

