


FROST

D E N M A R K

TOWEL BAR 1975

DESIGNED BY BØNNELYCKE MDD

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

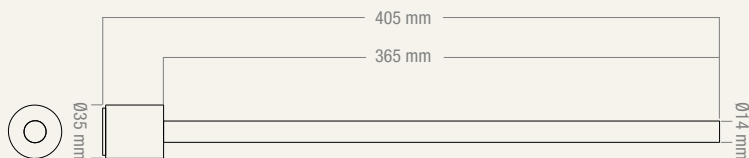

MATERIAL: STAINLESS STEEL

AVAILABLE IN THE NINE FROST FINISHES:



N1975
BRUSHED
STAINLESS



O1975
POLISHED
STAINLESS



N1975-BOC
BRUSHED
COPPER



N1975-C
POLISHED
COPPER



N1975-BMG
BRUSHED
GOLD



N1975-GO
POLISHED
GOLD



N1975-BCB
BRUSHED
BLACK



N1975-B
MATT
BLACK




N1975-W
MATT
WHITE




MOUNTING

- 1 Place the Towel Bar in the desired position and mark the screw hole.


Drill the hole using a 8 mm drill bit and insert the enclosed $\varnothing 8 \times 38$ mm wall plugs (A).

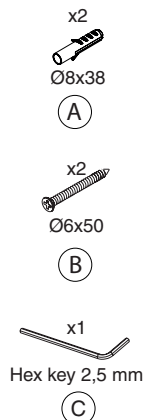


- 2 Secure the insert on the wall with the enclosed $\varnothing 6 \times 50$ mm screws (B) and use a Phillips screwdriver with bit PH2 to tighten the screws.

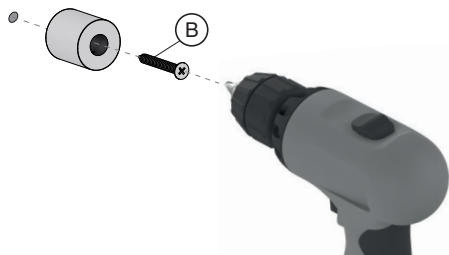

- 3 Press the Bar into the insert.

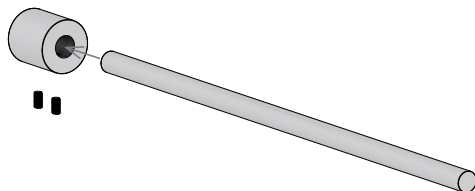

- 4 Securely tighten the set screws (D) underneath with the hex key (C), ensuring the Bar is firmly fixed.

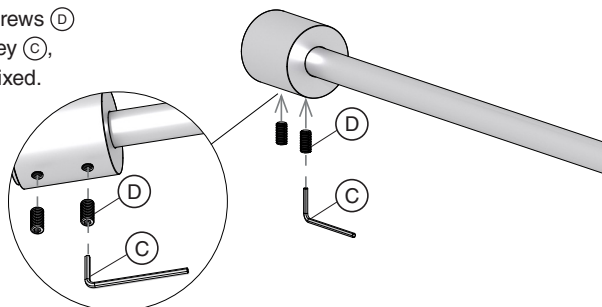

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

