


FROST

D E N M A R K

RADA SHOE RACK 5001 & 5002


DESIGNED BY BUSK + HERTZOG

PRODUCT DETAILS, TECHNICAL DETAILS
AND FITTING INSTRUCTIONS

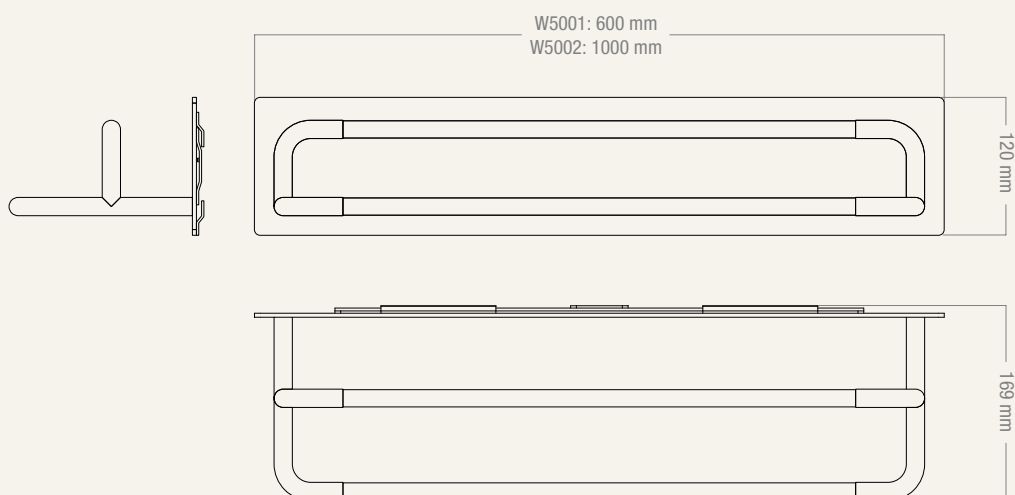

MATERIAL: STEEL / STAINLESS STEEL

AVAILABLE IN THE FROST FINISHES:

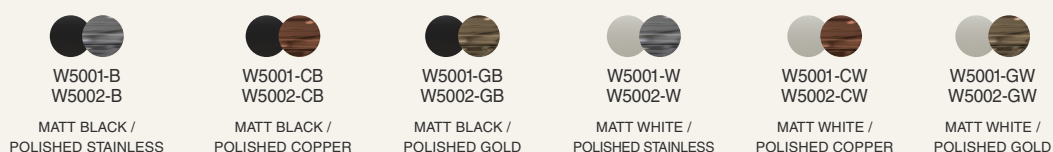





MOUNTING

- ① Hold the mounting bar in the desired position and mark the screw holes.

Drill the marked holes using a 8 mm drill bit and insert the enclosed Ø8x38 mm wall plugs (A).

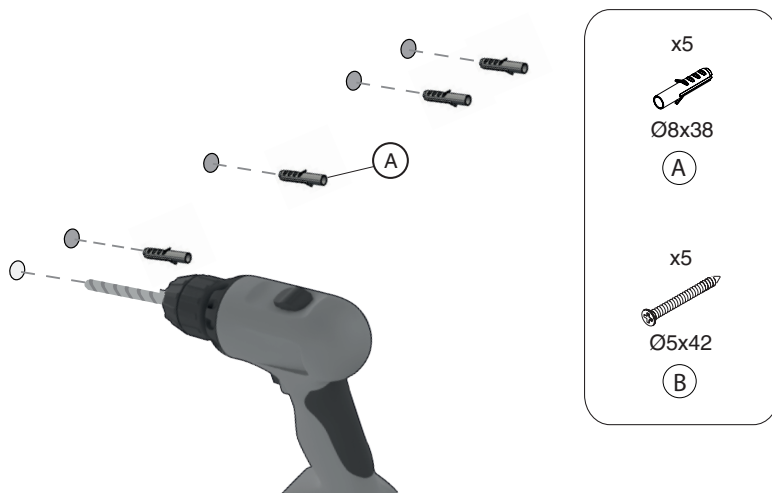


- ② Secure the mounting bar onto the wall with the enclosed Ø5x42 mm screws (B) and use a Phillips screwdriver with bit PH2 to tighten the screws.

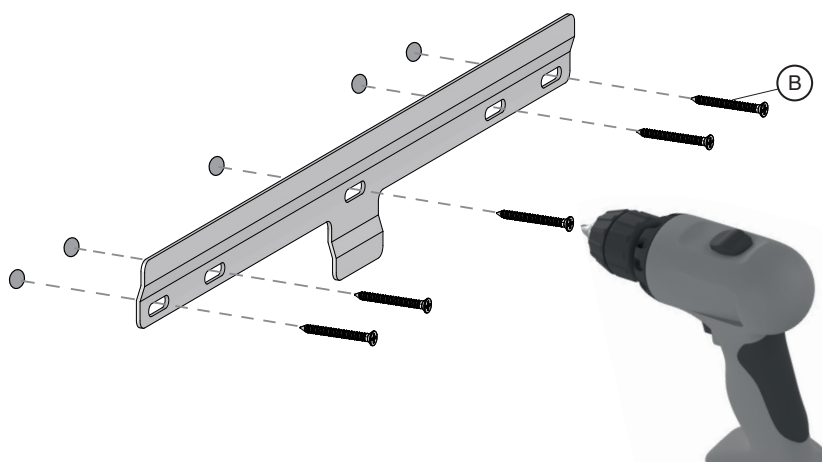

- ③ Hang up the Shoe Rack by pushing it sideways into the centre of the mounting bar. If necessary, use a rubber hammer to tamp it carefully into the correct position.

Your Shoe Rack is now ready for use.
The unique design of RADA gives the option to place the shoes in two different ways, making it suitable for both high heels as well as trainers and boots.

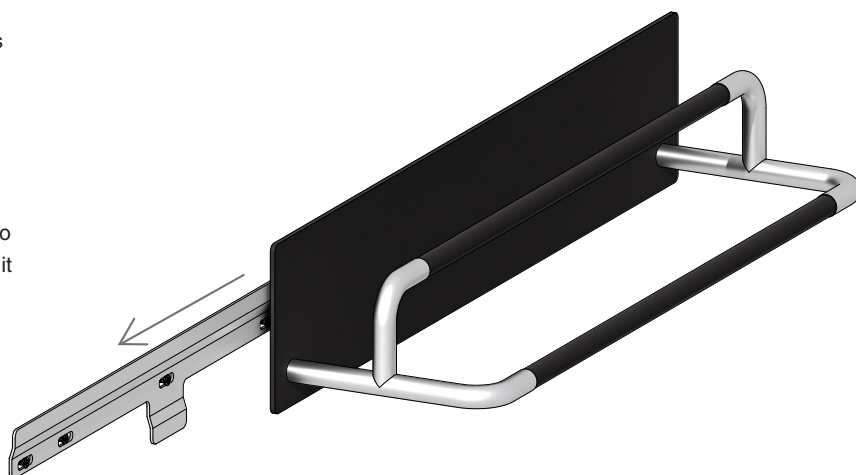

CLEANING AND MAINTENANCE

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

ATTENTION:

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

EXCLUSION OF LIABILITY

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

WARNING AND HAZARD NOTICES

Improper mounting or use can lead to accidents and serious injuries.

www.frostdenmark.com

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: info@frost.dk • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,
Instagram, Pinterest and LinkedIn

